


3000 AIR SLIDE

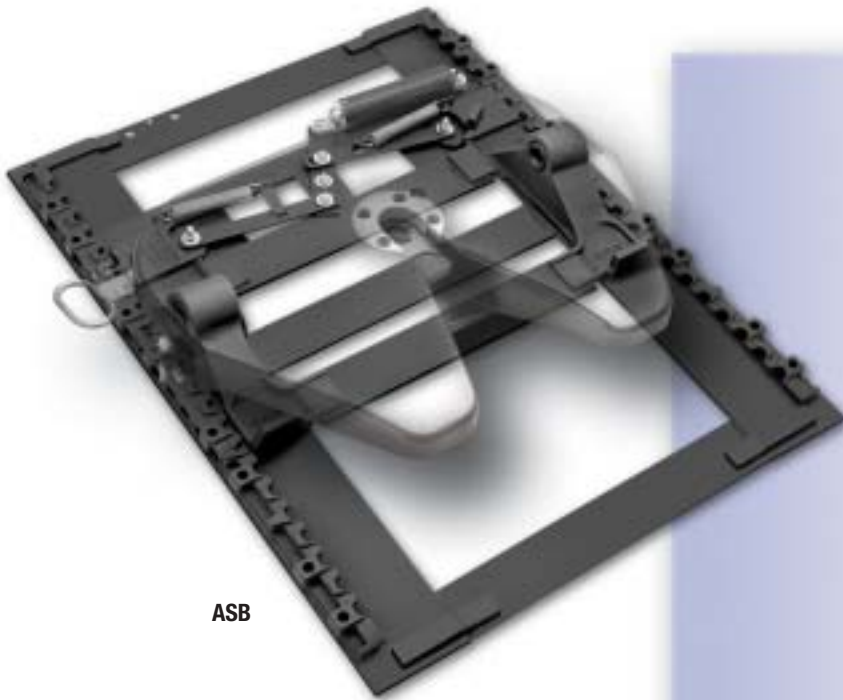

ASB

If it seems like you're repositioning your fifth wheel after every drop, here's the perfect solution. The new Fontaine ASB Air Slide makes adjustments faster and easier than ever before. The ASB also features new design improvements that will extend service life.

The ASB air slide features a new composite air cylinder that improves sealing performance and provides superior corrosion resistance for longer service life. The new Quad-Lock™ four point locking system increases locking surface area for greater stability and durability. The slide increment is 2" for greater slide versatility and improved payload distribution.

The 3000 top plate features new greaseless bracket liners that fit on the APB plate to give you consistent lubrication, reduce wear and cut maintenance costs. The top plate is manufactured using ductile iron for increased strength.

The Fontaine® Air Slide Fifth Wheel is available in a wide range of mounting heights and travel lengths to meet your hauling needs.



3000 SERIES

Approved to
94/20/EC.
Directive:
D-Value 150
U-Value 20

Air Slide Fifth Wheels (ASB)

FIFTH WHEEL MODEL NUMBER	MOUNTING HEIGHT	SLIDE TRAVEL	3000 WEIGHT
SL3ASB675012		12"	426
SL3ASB675016		16"	440
SL3ASB675024	6 ³ / ₄ "	24"	451
SL3ASB675036		36"	474
SL3ASB775012		12"	431
SL3ASB775016		16"	445
SL3ASB775024	7 ³ / ₄ "	24"	456
SL3ASB775036		36"	479
SL3ASB875012		12"	436
SL3ASB875016		16"	450
SL3ASB875024	8 ³ / ₄ "	24"	461
SL3ASB875036		36"	484

3000 Series Top Plate

The economical 3000 Series does not feature the No-Slack® II technology, but it does give you several advantages over ordinary fifth wheels. The locking mechanism features a patented kingpin height sensor that acts as a safety trigger. If the kingpin enters at the wrong height it will not allow the fifth wheel to close. If you have no contact ... you have no couple. This important safety feature virtually eliminates false trailer couplings to prevent dangerous high-hitching. Approximate weight: 215 lbs.

